



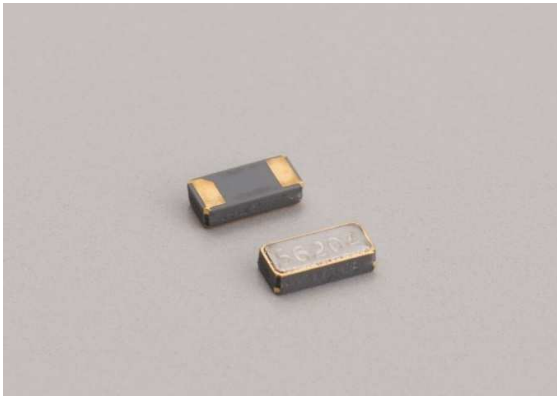


FEATURES

- Low ESR type 50K Ω MAX
- Frequency range : 32.768kHz
- External dimensions (mm)
L : 3.2 x W : 1.5 x H : 0.9
- Applications
Products designed for low power consumption
Smart Meters / IoT Modules /
Small mobile devices / Consumer products /

DIMENSION [mm]

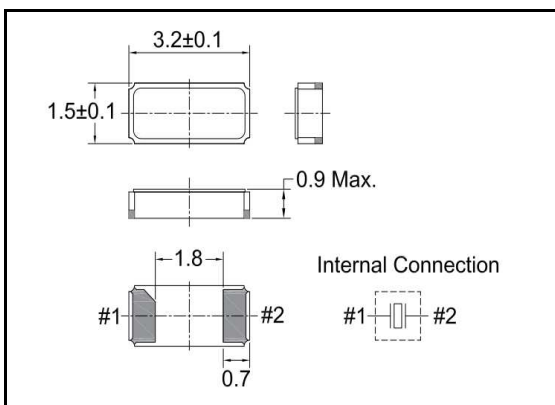


SOLDER PAD LAYOUT [mm]

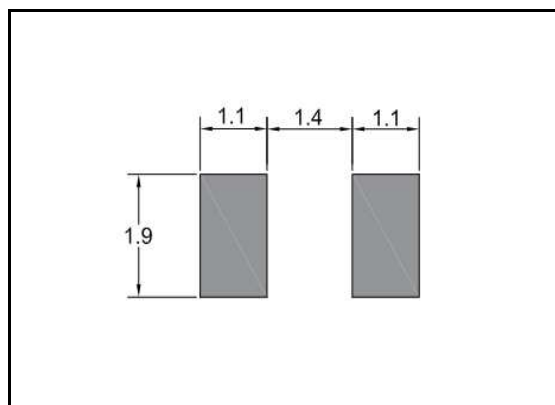

STANDARD SPECIFICATIONS


Item	Model	CM315DL	Conditions
Nominal Frequency	f_0	32.768kHz	
Frequency Tolerance	$\Delta f/f_0$	$\pm 5\text{ppm}$ / $\pm 10\text{ppm}$ / $\pm 20\text{ppm}$	at 25°C
Load capacitance	C_L	6.0pF / 7.0pF / 9.0pF / 12.5pF	Please specify your requirement
Operating Temperature Range	T_{OPR}	-40°C ~ +85°C (~105°C)	Please inquire for 105°C compatible products.
Storage Temperature Range	T_{STR}	-55°C ~ +125°C	
Turnover Temperature	T_M	25°C $\pm$ 5°C	
Temperature Coefficient	β	-0.034 $\pm$ 0.006ppm/°C ²	
Motional (series) resistance	R_1	50K Ω Max. 60K Ω Max.	at +25°C -40°C ~ +105°C
Level of drive	D_L	0.5 μ W Max.	
Aging (first year)	$\Delta f/f_0$	$\pm 3\text{ppm}$ Max.	25°C $\pm$ 3°C
Shunt capacitance	C_0	1.05pF Typ.	

■ PART NUMBERING SYSTEM

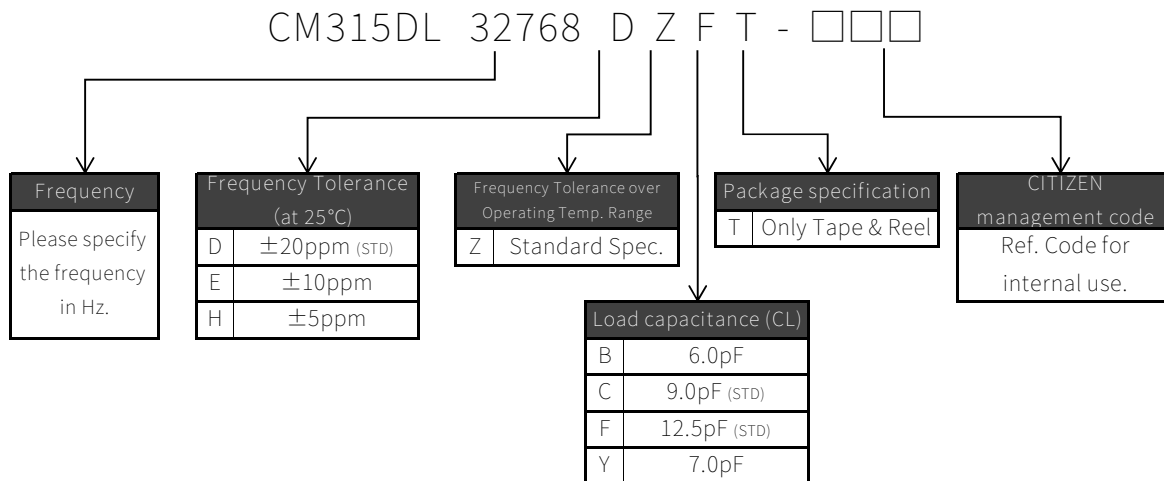

*Please contact us for specifications available.

■ Part Marking [standard]



y : The last digit of production year

m : Production month (See Table.1)


L : Manufacture's ID Code

#: Production Lot No.


Table.1

Month	Jan	Feb	...	Sep	Oct	Nov	Dec
Code	1	2	...	9	X	Y	Z


- Reflow profile

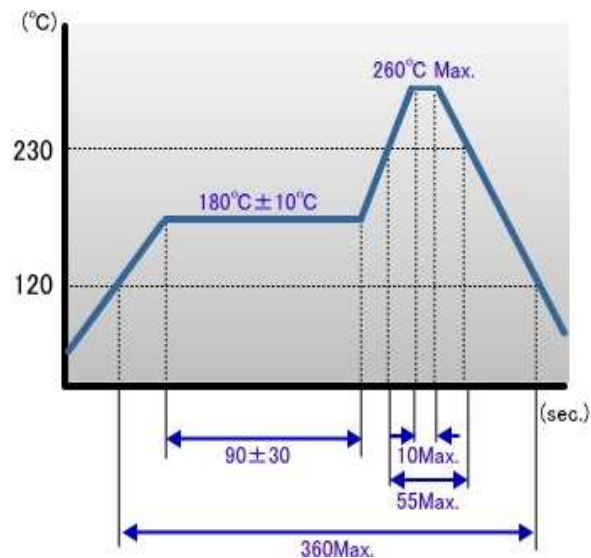

- Packing

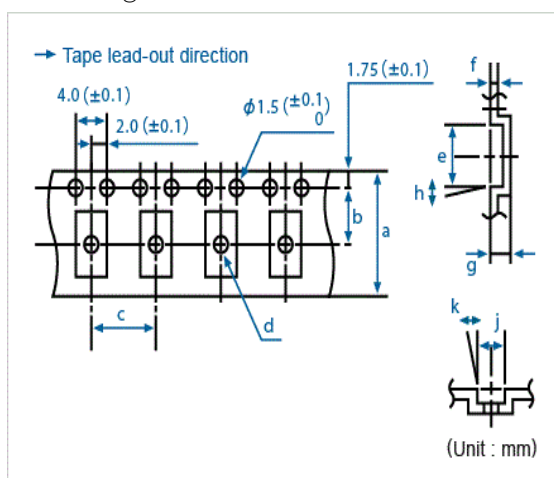

Conforming to JIS C 0806 TB1208NEIAJ and RC-1009B TE1208M

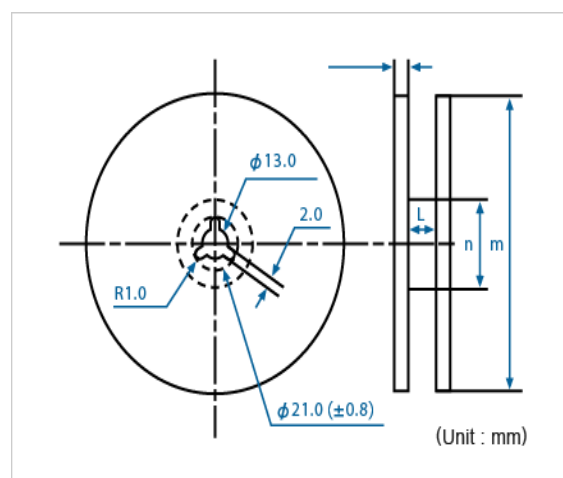

Conforming to JIS C 0806 R12R and EIAJ RC-1009B R15

Q'ty/reel	a	b	c	d (φ)	e	f	g	h	j	k	l	m (φ)	n (φ)
3,000	12.0	5.5	4.0	1.0	3.6	0.3	1.0	5°	1.9	5°	13.0	180	60

Product specifications are subject to change without notice.

Rev. 2